


NEW REVOLUTIONARY!

LASERSPEED® PRO M SERIES


NON-CONTACT LENGTH
& SPEED GAUGE FOR
BOUNCING, UNGUIDED
MOVING PRODUCTS

PATENTED

No comparable
measurement
solution on
the market today!

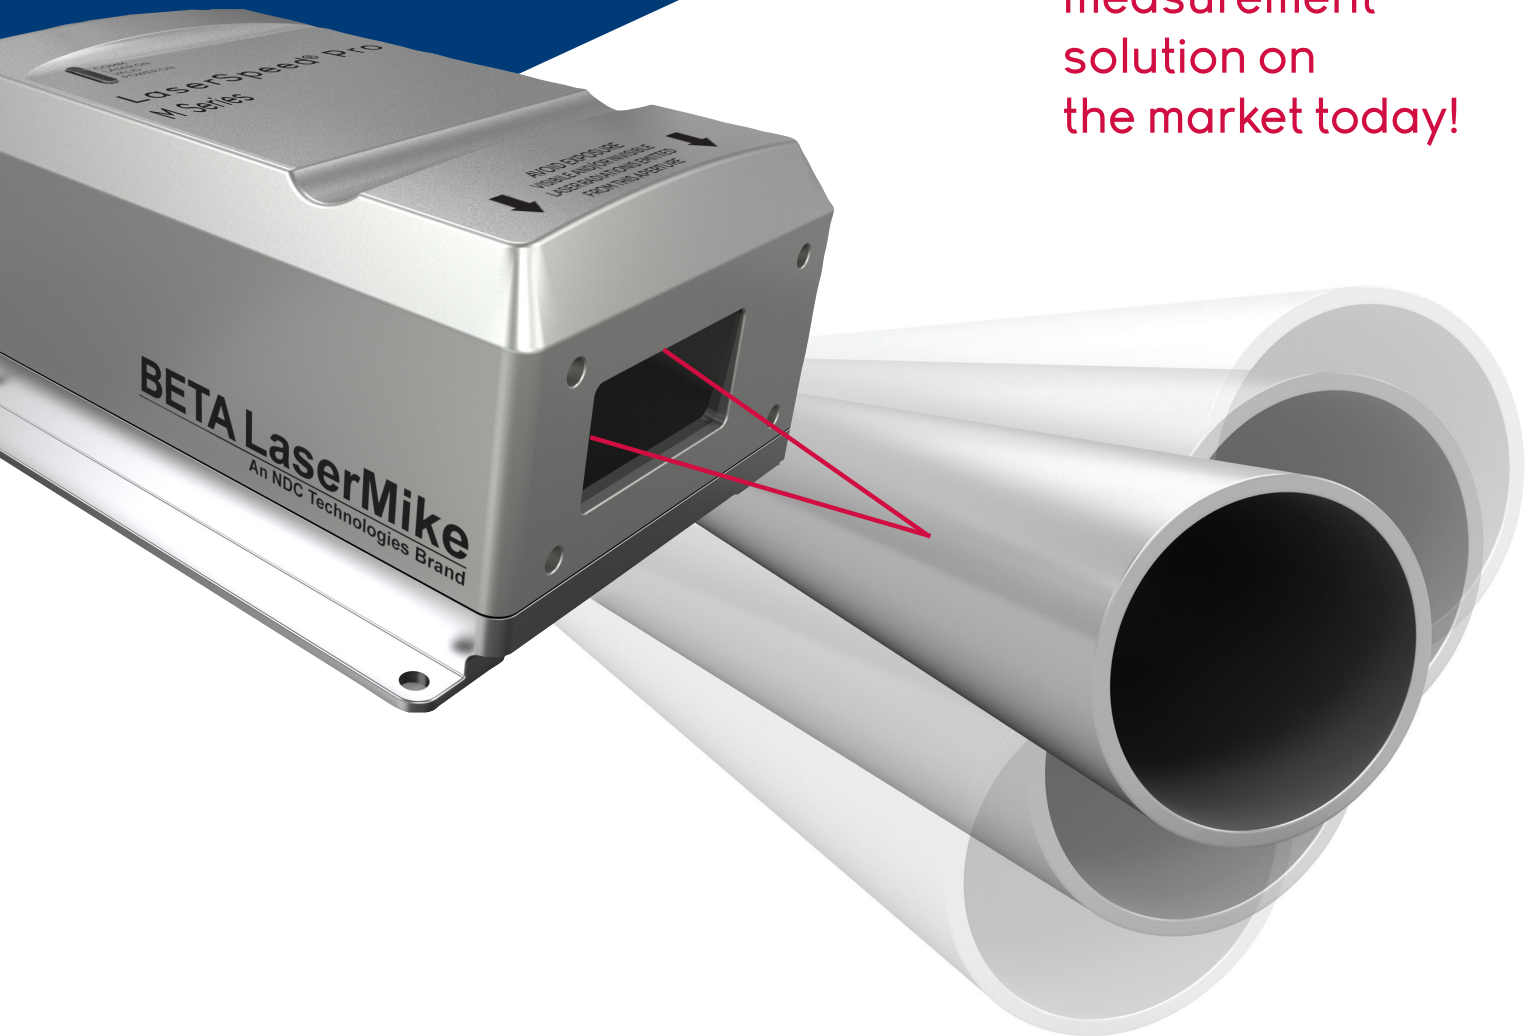

LaserSpeed Pro M Series – Solving Industry's Critical Measurement Challenge

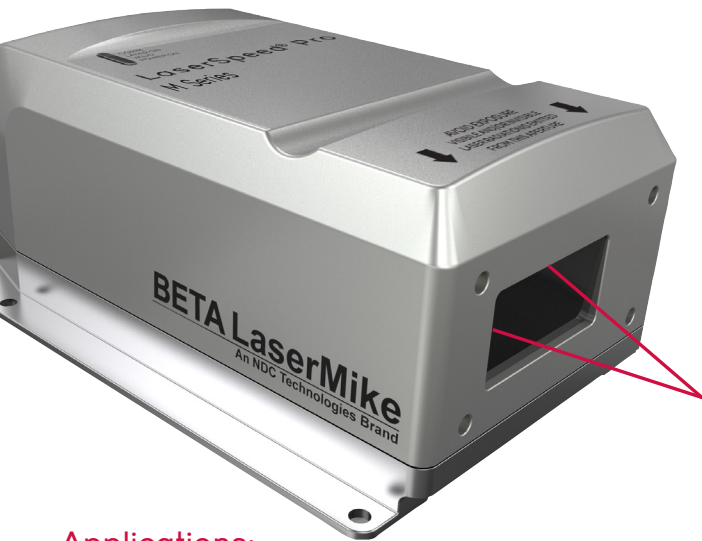

Applications:

Use LaserSpeed Pro M Series in critical measurement applications such as hot and cold:

- ▶ Bare conductor wire
- ▶ Insulated primary wire
- ▶ Cable
- ▶ Steel / Copper wire draw lines
- ▶ Metal rod / bar*
- ▶ Small pipe / tube / hose
- ▶ Metal and non-metallic cord
- ▶ And other hard-to-measure cylindrical products


*Examples of metal bar/rod applications: reducing/sizing mills, non-twist rolling mills, prediction of tension, speed monitoring in mass flow automatic gauge control and cut-to-length measurement in torch/saw/shear operations.

Revolutionary LDV Gauge Provides Most Reliable Length & Speed Measurements

Unlike anything on the marketplace today, NDC's new patented LaserSpeed Pro M Series non-contact gauge uses a revolutionary Laser Doppler Velocimetry (LDV) optical technique to provide reliable, robust length and speed measurements of small, bouncing and unguided cylindrical moving products. From bare conductor wire... to small plastic tubing... to hot metal cylindrical rods, the LaserSpeed M Series gauge enables manufacturers to effectively control product speed and process functions in the most challenging production applications.





Issues with Bouncing, Moving Product?

LDV has been a long-proven method for accurately measuring the length and speed of products. But many applications involving the production of **long, continuous cylindrical products** pose measurement challenges. Products that cannot be well-guided, move off-axis and move out of the measurement range make it difficult for traditional LDV-based gauges to keep the laser on the product's surface. This results in hard-to-obtain and unreliable length and speed measurements. Cylindrical products that are small and/or have a severe curvature compound this measurement issue.



The Cost of Unreliability

These measurement issues can dramatically affect the ability to control product speed, achieve accurate cut-to-length requirements and other critical process functions. Moreover, unreliable measurements can cost your organization a significant amount of money due to product give-away, waste resulting from scrap, loss in productivity, process downtime and other conditions.

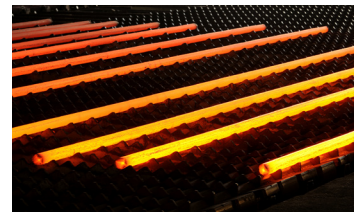


There is No Comparable Measurement Solution on the Market Today

- ▶ Delivers unparalleled performance on hard-to-measure, round moving products regardless of size, curvature, material type, color or texture
- ▶ Permanently calibrated and no moving parts for lowest cost of ownership
- ▶ Easily integrates into the process with the widest range of connectivity options: ModBus TCP, Ethernet/IP and Profinet IO, as well as fieldbus support for Profibus DP
- ▶ LaserSpeed Pro Webserver enables direct connection to gauge via IP address for diagnostics, data storage, trending, LaserTrak gauge setup and operation tools, and more
- ▶ 2-year product warranty on all components / 3-year warranty on advanced ultra-stable laser diode that provides the industry's longest lifespan

How it Works


The LaserSpeed Pro **M Series** gauge is engineered with a proprietary optical engine not found in any other measurement system. It uses a special LDV beam method to project a unique laser pattern on the surface of the moving product. As small, bouncing and unguided cylindrical products move through an optimized measurement range, the LaserSpeed Pro **M Series** gauge reliably measures the length and speed with the highest repeatable accuracy.

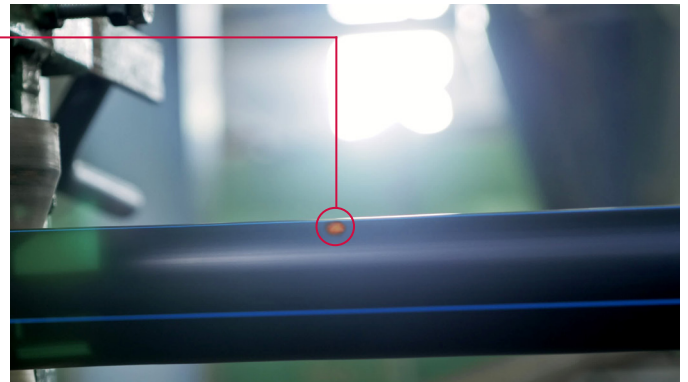

Accessories



Airwipe and Quick-Change Window
Designed for dirty environments, the airwipe and quick change window help to ensure minimal downtime for window cleaning.



Breakout Box/Power Supply
Provides easy access to all gauge inputs and outputs. Also provides power to the LaserSpeed Pro.



Environmental Housing
Provides heavy-duty, double-sealed protection against hot and humid environments.



Accessory Case
A convenient case to hold the LaserSpeed Pro and all accessories safe and secure.



DP700 Display **NEW!**
Displays LaserSpeed Pro length, velocity, quality factor and gauge status, and lets you configure gauge and process settings. Includes Ethernet/IP and Modbus TCP for Allen Bradley controls.



Adjustable Mounting Bracket
Enables you to adjust or tilt the gauge in three axes to achieve the desired measurement angle for your unique application.

	-403	-406	-410
Standoff Distance	300 mm (12 in.)	600 mm (24 in.)	1000 mm (39.4 in.)
Speed Range	0.4 to 4000 m/min (1.3 to 13100 ft/min)	0.8 to 8000 m/min (2.6 to 26200 ft/min)	1.0 to 12000 m/min (3.2 to 39400 ft/min)
Accuracy	<±0.05% of reading	<±0.07% of reading	Depth of Field <25 mm: <±0.10% of reading Depth of Field >25 mm: <±0.15% of reading
Repeatability	±0.02%	±0.02%	±0.02%
Measurement Depth of Field	20 mm (0.8 in.)	30 mm (1.2 in.)	40 mm (1.6 in.)
Measurement Height (Y axis)	20 mm (0.8 in.)	20 mm (0.8 in.)	20 mm (0.8 in.)

LS Pro 8500-4 M Series

Measurement Rate	LS Pro 8500: <50,000/s	Acceleration Rate	<500 m/s ²
Starting/Ending Length Correction	Yes	User Isolated Voltage	5 to 24 VDC (300mA)
Serial I/O Data Available	<ul style="list-style-type: none"> RS-232 / RS-422 Speed, Length Quality Factor, Status 	Relative Humidity	Non-condensing
Baud Rate	<ul style="list-style-type: none"> 460K, 230K, 115K, 57.6K, 38.4K, 19.2K, 9.6K, 4.8K 	Units of measure	Selectable
Status via Serial I/O or Ethernet	<ul style="list-style-type: none"> Laser at Temperature Laser Interlock Shutter Position Valid Measurements Material Present System Ready 	Speed	m/min, m/s, ft/min, ft/s, in/min, mm/sec, yards/in, yards/sec
Quadrature Pulse Output 1	<ul style="list-style-type: none"> Opto isolated Scaleable pulse amplitude (5-24V) Selectable pulses/unit 250 KHz max pulse rate 	Length	mm, m, ft, in, yards
Output 2	<ul style="list-style-type: none"> RS-422 Drivers Selectable pulses/unit 5 MHz max pulse rate 	Fieldbus	Ethernet (ModBus TCP, Ethernet/IP, Profinet IO); Profibus DP
Index pulse output	Yes/programmable	Connectivity	Profibus DP
Gauge Power	24VDC (±4 VDC) @ 1.5 Amp, 50 mV ripple max	Product Warranty	2 years
Gauge Size	203 x 159 x 97.5 mm (8.0 x 6.25 x 3.84 in.)	Laser Diode Warranty	3 years
Gauge Weight	3.3 kg (7.2 lbs)	Cooling*	
Temperature Range*	5 to 45°C (41 to 113°F)	Air	<ul style="list-style-type: none"> Pressure: Less than 70 kPa (< 10 PSI) Flow Rate: 50 l/min (2 SCFM) Typical
Output Rate	1 to 2000 ms in 1 ms increments	Water	<ul style="list-style-type: none"> Pressure: Less than 207 kPa (< 30 PSI) Flow Rate: 1.0 to 3.8 l/min (0.26 to 1 gpm) 1.5 l/m (0.4 gpm) Typical Coolant Temp: 5 to 45°C (41 to 113°F)
Spot Size	3 x 20 mm	Analog Output	0-2V Velocity or quality factor
		Ethernet	10/100 Base-T (M12)
		Multiple Simultaneous Host Connections	Proprietary & industry standard protocols

*Gauge can be cooled with air, water or encased in a protective housing (E or X).

NDC Technologies is represented in over 60 countries worldwide. www.ndc.com/betalasermike

NDC Americas
Tel: +1 937 233 9935
Email: info@ndc.com

NDC China
Tel: +86 21 6113 3617
Email: ndcchina@ndc.com

NDC Germany
Tel: 08001123194
Email: ndcgermany@ndc.com

NDC India
Tel: +91 9971232913
Email: ndcindia@ndc.com

NDC United Kingdom
Tel: +44 1621 852244
Email: ndcuk@ndc.com

NDC Japan
Tel: +81 3 3255 8157
Email: ndcjapan@ndc.com

NDC Italy
Tel: +39 0331 454 207
Email: ndcitaly@ndc.com

NDC South Korea
Tel: +82 (10) 40682926
Email: ndcapac@ndc.com

In line with its policy of continuous improvement, NDC reserves the right to revise or replace its products or services without prior notice. The information contained in this document may not represent the latest specification and is for indicative purposes only.

Document #: C&T-BROC-SENS-LS Pro M Series-EN-2022JUNE06
Date of Issue: June 2022
© NDC Technologies 2022

Intelligence that transforms the world.